




海洋儀器

致力于电子测试、维护领域!

F62 - F65 Leakage multimeter clamps

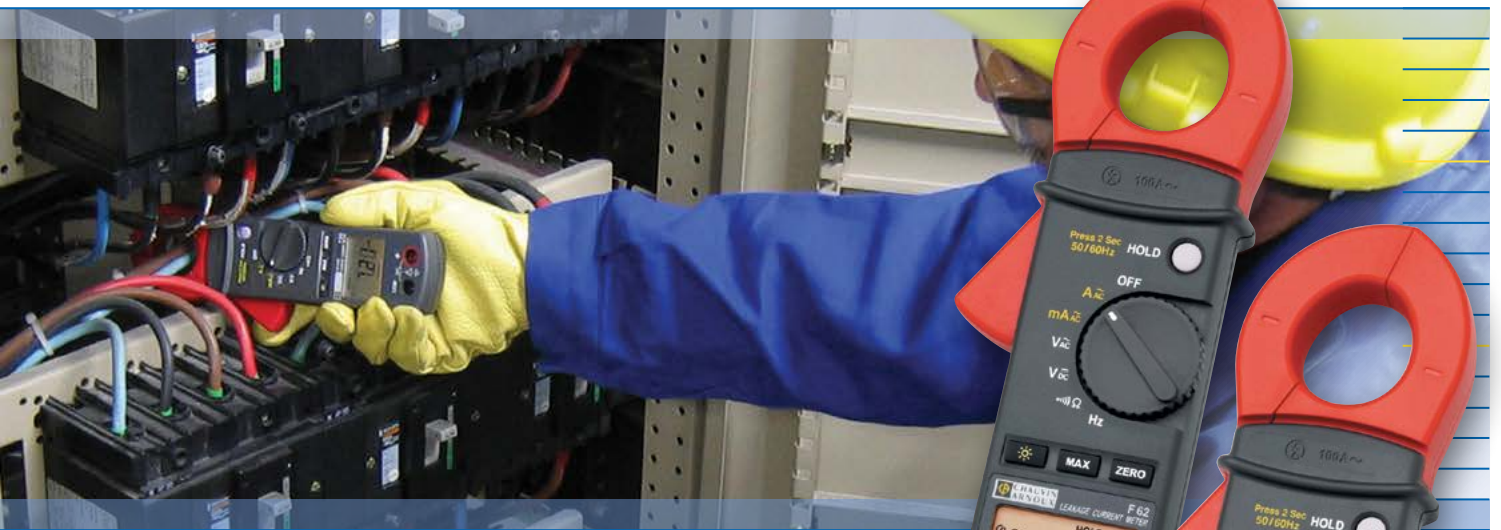

**For rapid testing of leakage currents
and isolation faults on live installations!**

- Analysis of RCD trigger currents
- Earth leakage currents
- Unbalanced phase currents
- High immunity to currents of adjacent conductors
- Anti-harmonic filter selection for enhanced fault detection on disturbed systems
- 3-year warranty
- Compliance with standard VDE 0404

Measure up



Rapid testing for leakage currents...

Your installation and its users may be endangered through isolation faults and untimely RCD tripping. Such phenomena are often caused by leakage currents that prove difficult to detect.

For testing and maintenance professionals in the industrial and tertiary sectors faced with this challenge, **F62/F65** pocket-sized clamps are the recognised solution, while providing the full range of functions proposed by conventional multimeter clamps.




DETECTION OF LEAKAGE CURRENTS AND ISOLATION FAULTS


Offering exceptional resolution of 10 μA and high immunity (70 dB) to eddy currents, **F62/F65** clamps are specially suited to the measurement of leakage currents that trigger RCDs, causing imbalances between phase-phase and phase-earth currents.

The harmonic filter facilitates the detection of faults on disturbed systems and power circuits (switched power supplies, variable speed drives, inverters, etc.).

Isolation fault detection on live installations

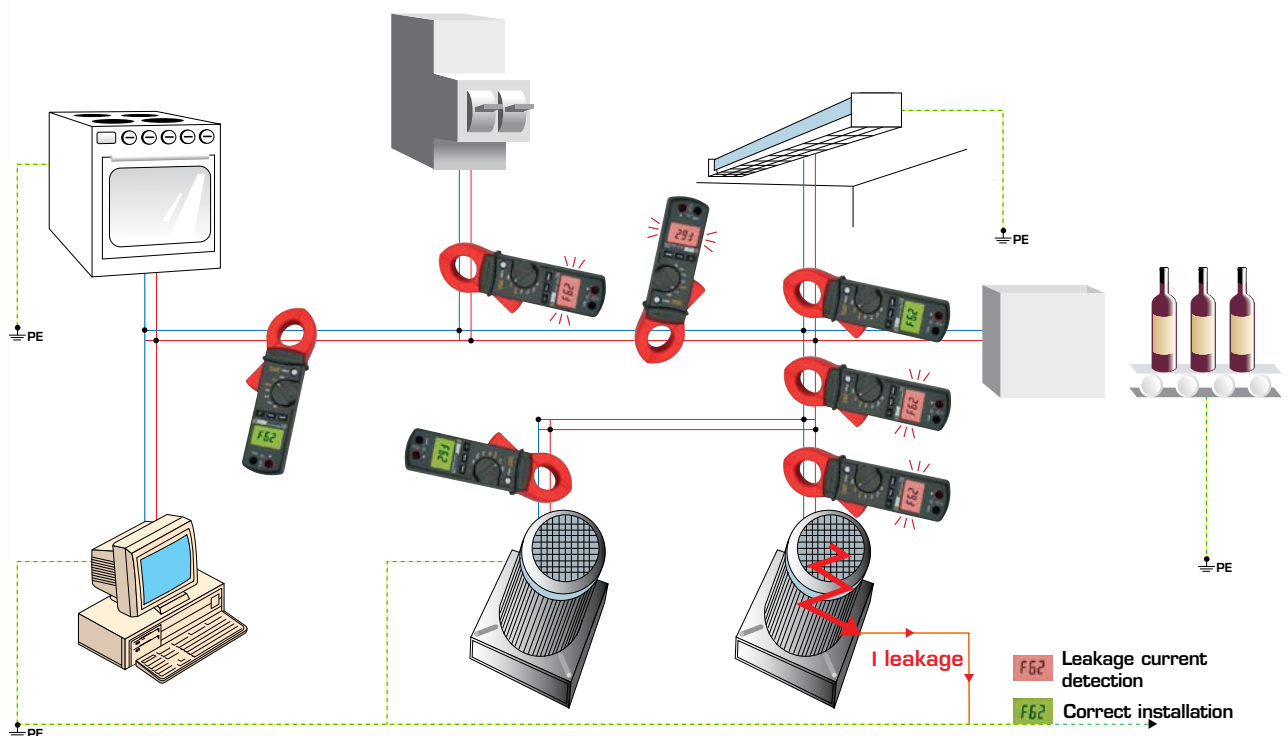


and detection of isolation faults on live installations!

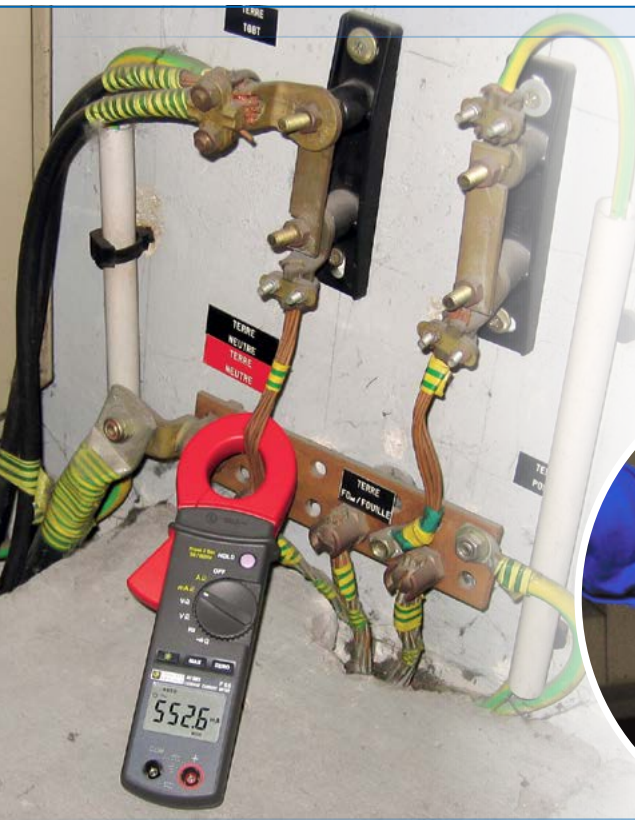


ALL-PURPOSE MULTIMETER CLAMPS

F62 and **F65** pocket-sized clamps provide the full range of functions proposed by conventional clamp-on multimeters: current up to 100 A, AC/DC voltage, frequency, resistance and audible continuity.

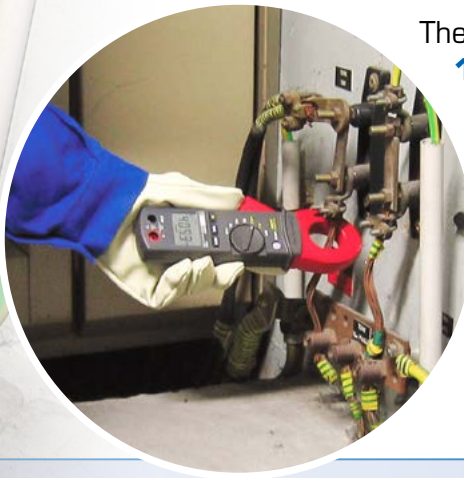

They are equipped with a **backlit 10,000-count LCD screen**, with display memory and **maximum value and differential measurement functions** (Delta). To optimise the battery life, they come equipped with an **automatic power-off function**, in the event of prolonged periods without use.

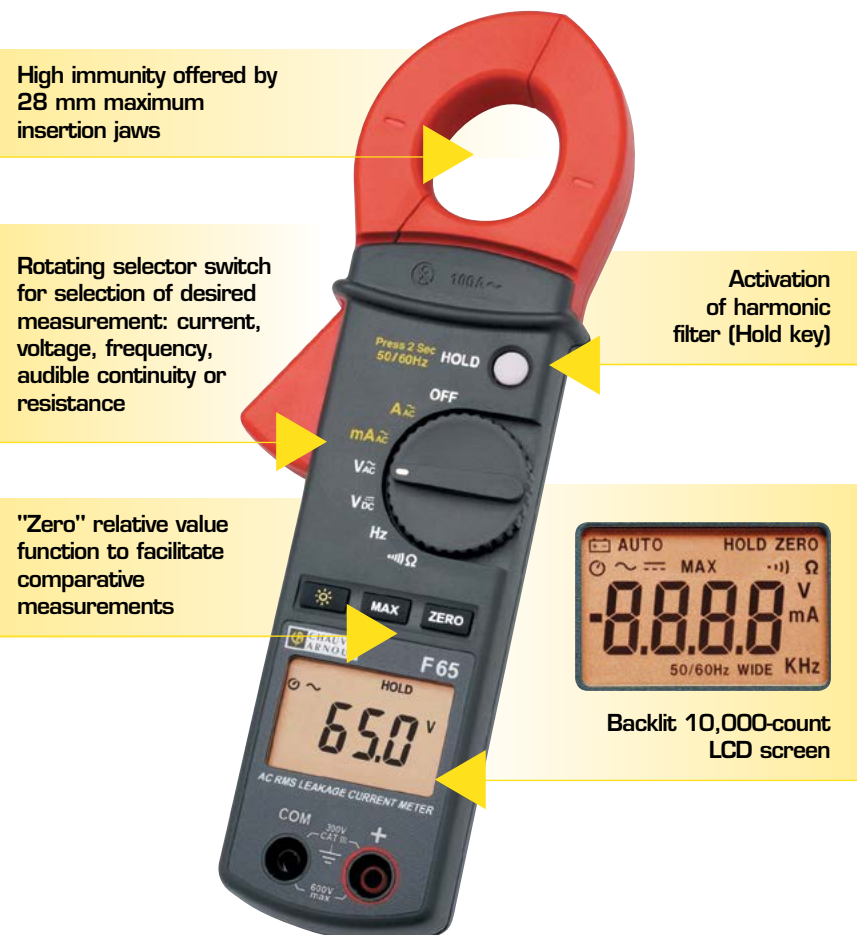


High immunity offered by 28 mm maximum insertion jaws

Rotating selector switch for selection of desired measurement: current, voltage, frequency, audible continuity or resistance

"Zero" relative value function to facilitate comparative measurements

Activation of harmonic filter (Hold key)



Backlit 10,000-count LCD screen

Other Chauvin Arnoux products for use in association with F62/F65 clamps

Clamp jaws open to 115 mm!

The **B102 clamp**, associated with a multimeter, is the ideal accessory for use with F62/F65 clamps for the testing of installation feeders on large-diameter conductors.



Complete verification of the safety of your electrical installations

In domestic, tertiary or industrial environments (TT, TN or IT systems), the **C.A 6116N electrical installation tester** offers a wide range of measurements for checking and certifying electrical installations' safety and compliance with the standards.



F62 - F65 SPECIFICATIONS

				F62		F65		
RMS measurement						●		
Function	Calibre	Resolution	Accuracy				Protection against overloads	
			<i>with filtre 50-60 Hz</i>		<i>with filtre 50-60 Hz</i>			
AC current	mA AC	60 mA	10 µA	1.2 % ± 5 cts	2.5 % ± 5 cts	1.2 % ± 5 cts	2.5 % ± 5 cts (50-500 Hz) 3.5 % ± 10 cts (500 Hz-3 kHz)	150 Arms
		600 mA	100 µA					
	A AC	10 A	1 mA	1.2 % ± 5 cts	2.5 % ± 5 cts	1.2 % ± 5 cts	2.5 % ± 5 cts (50-500 Hz) 3.5 % ± 10 cts (500 Hz-3 kHz)	
		80 A	10 mA					
100 A	5 % ± 5 cts	5 % ± 5 cts (50-60 Hz)		5 % ± 5 cts	5 % ± 5 cts (50-60 Hz)			
Voltage	V AC	600 V	0.1 V	1 % ± 5 cts (50-60 Hz) 1.2 % ± 5 cts (50-500 Hz)		1 % ± 5 cts (50-60 Hz) 1.2 % ± 5 cts (50-500 Hz) 2.5 % ± 5 cts (500 Hz-3 kHz)		660 Vrms
	V DC	600 V	0.1 V	1 % ± 2 cts				
Resistance	Ω	1 kΩ	0.1 Ω	1 % ± 3 cts (Vmax measurement 3.3 V DC)				600 Vrms
Audible continuity	Buzzer < 35 Ω							
Frequency	A Hz	100 Hz 1 kHz	0.1 Hz 1 Hz	0.5 % ± 2 cts (I > 10 mA)				
	V Hz	100 Hz 1 kHz	0.1 Hz 1 Hz	0.5 % ± 2 cts (V > 5 V)				
Display				10,000 counts - 2 measurements / s				
Backlit LCD				●		●		
MAX. value				100 ms				
Relative measurement (Δ0)				●		●		
Automatic switch-off/ HOLD function				●		●		
Large clamping diameter				28 mm				
Dimensions				218 x 64 x 30 mm				
Weight				280 g (with batteries)				
Standards				IEC 61010-1 / IEC 61010-2-032 / IEC 61010-2-033				
Installation category				CAT III 300 V				
Protection rating of casing				IP 30 as per NF EN 60529				


● To order

Leakage multimeter clamps

F62..... PO1120760

F65..... PO1120761

Delivered with a set of elbowed male banana/straight male banana leads, 1 set of test probes, 2 x 1.5 V AAA/LR3 batteries, 1 bag and 1 operating manual in 5 languages.

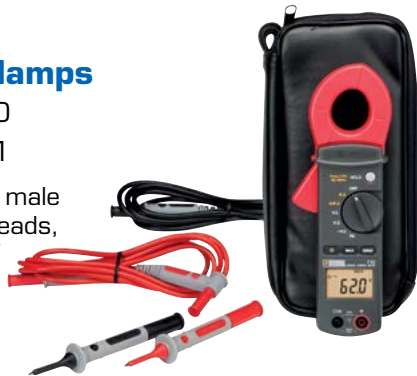

Accessories and replacement parts

Multiple accessories and measurement leads available.

Please see the guide

www.chauvin-arnoux.com



北京海洋兴业科技股份有限公司 (证券代码: 839145)

北京市西三旗东黄平路19号龙旗广场4号楼 (E座) 906室

邮编: 100096

电话: 010-62176775 62178811 62176785

传真: 010-62176619

企业QQ: 800057747 维修QQ: 508005118

邮箱: market@oitek.com.cn

企业官网: www.hyxyyq.com

购线网: www.gooxian.com



扫描二维码关注我们
查找微信公众号: 海洋仪器